

GSE-250

Precision planetary servogearboxes

for general automation

GS gearboxes, the perfect match for rack&pinion systems


Better performance and increased reliability

Servotak Rack&Pinion systems are the best option when building machines that require linear motion with moderate feed force and precision. Available from module 0,5 to module 4, and combined with a GS series gearbox, they can handle multi-ton loads with moderate precision, in a smooth and quiet fashion, while maintaining a very high reliability.

Servotak offers four rack&pinion series: Basic, Professional, Advanced and Master. With 15 metric modules for straight teeth systems, and 12 for helical teeth systems, they cover all the industry requirements. Should your precision and/or feed force requirements exceed what GS series gearboxes can offer, SG series gearboxes allow for extremely high precision and for thrust forces of up to 400000 N.

Racks offering the highest security

Servotak's Basic, Advanced and Master series racks have are taller than conventional racks. This extra mass give them superior rigidity to absorb overloads, allow for vibration-free operation, and result in better quality finishes for the machine tool they're installed in. Fixing holes are arranged in a two row, V-shaped pattern, that offers added safety in emergency situations.

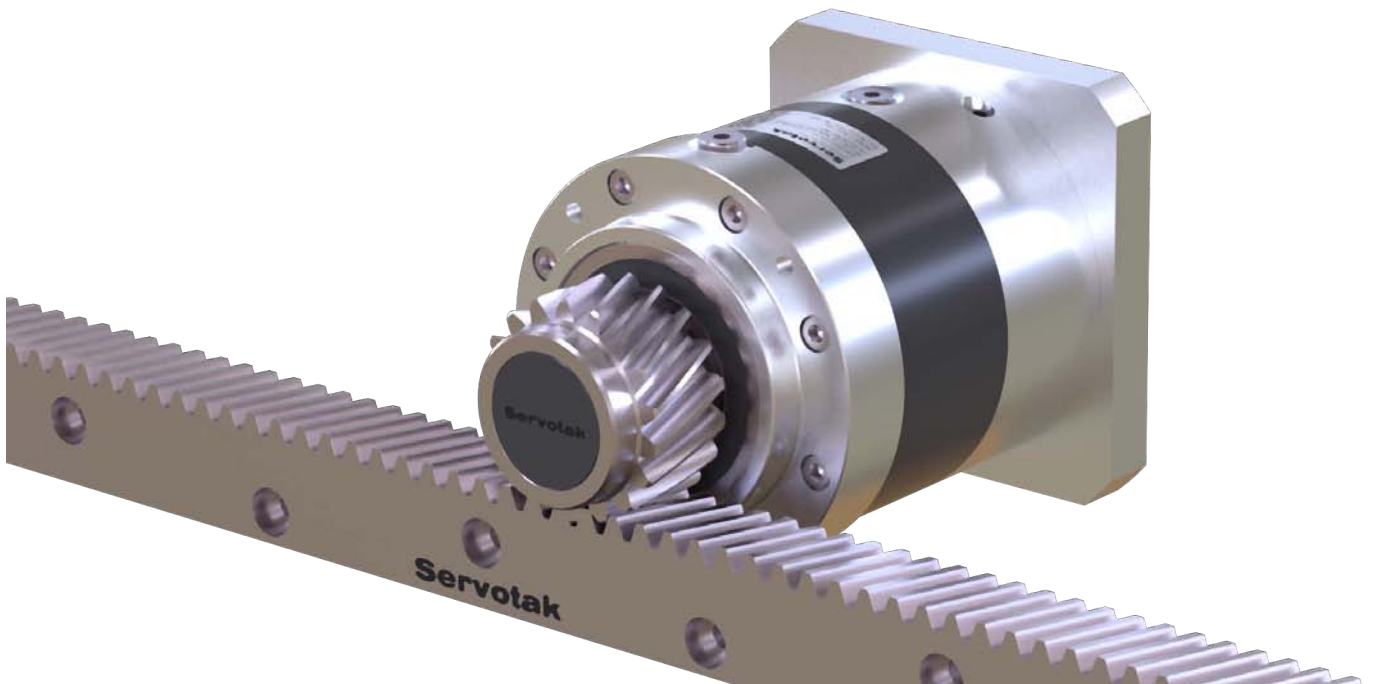

Precision and Feed Force

4 series of racks , combines with GS series gearboxes, provide moderate precision and feed force at very reasonable prices, thus offering excellent value. This winning combination is ideal for general automation, machine tools and robotics.

Longer Design Life

Thanks to an output shaft optimized for pinion installation, and to the reinforced output bearings that GSE gearboxes can include, this combination has a design life that is over twice what conventional systems can offer.

Smooth Operation

Thanks to an optimized tooth profile, and to the fact that the system has been studied as a whole, thus ensuring that all components are sized appropriately to one another, Servotak linear systems provide a markedly smoother operation.

Highest Reliability

Our engineering team prides itself in the rigor of their case studies. This results in no surprises, and so allows us to promise the highest possible reliability, even for the most stringent applications.

GSE-250

Highlights

- Output Torque: Up to 377 Nm
- Long design life, >40000 hours
- Thrice the torsional stiffness of GE-250
- Backlash: <6' to <12' (arcmin)
- Lifetime lubrication and maintenance-free.
- Can be used in any mounting position.
- DIN-6885-1 keyed shaft with DIN-332-2 axial fixing bore

Compact, reliable and made to last

The following technical specifications resulted from exhaustive calculations according to DIN, ISO and AGMA norms, years of research and experience, and Servotak's traditional reliability-first approach. This is why our gearboxes can offer a design life of over 40000 hours, twice the market standard, with total confidence.

Ideal for S5 intermittent duty

Instead of offering a single output torque value, and then asking engineers to apply service factors depending on cycles per hour, we present a tabulated list of output torques at most common cycle rate values.

The listed values for S5 intermittent duty assume general purpose applications. Specific duty cycles might allow for higher output torques. Should you think that your specific application's details don't fit our assumptions, please contact our engineers for a through study. We also offer an online tool to calculate the RMS average torque for complex cycles at https://servotak.eu/tools/duty_cycle_calculator.

A word about S1 continuous duty

Over 90% of the commonly available planetary gearboxes are designed for intermittent duty cycles. They are not designed for S1 continuous duty cycles. The reason being that one of the main advantages of planetary gearboxes is their compact design. While this offers great space savings, it also reduces the outer surface needed to radiate heat, and in S1 cycles, this reduces the amount of power they can transmit. Should you require such duty cycles out of a planetary gearbox, there are some things you need to remember:

- Ensure there is good airflow around the gearbox. Transmissible torque can be further increased by using active cooling methods on the gearbox, such as forced cooling.
- The gearbox mounting surface can also act as a heat sink. If possible, ensure it extends around the gearbox, is exposed, and receives good airflow.
- Brushless motors generate considerable amount of heat, and thus further reduce the gearbox's torque transmission capacity. Employ motors with built in cooling fins and cooling fans.
- Due to grease's poor heat dissipation capabilities, when intended for S1 operation, GSE gearboxes come filled with synthetic oil.
- Tapered roller bearings generate great amounts of waste heat when used in S1 continuous duty. This is the reason why GSE-250 gearboxes come with angular contact ball bearings, that offer a high radial capacity while generating much less heat.
- High input speeds further increase generated heat and thus further reduce torque transmission capacity.

Our engineers will be more than happy to advise you on the different caveats of gearboxes in S1 cycles.

Technical data for S5 intermittent service

GSE-250-M2 (2 stages)		Ratio							
		15	21	25	30	35	50	70	100
Max. Acceleration output torque for S5 intermittent duty cycles T_{2max} (Nm) S5 intermittent duty cycle Duty cycle ED<60%, Cycle duration t_{cycle} <20 min Average cycle speed $\leq n_{1TH}$ Maximum cycle speed $\leq n_{1max}$ As per DIN-3990 and ISO-6336	60 cycles/hour	377	377	344	377	344	344	320	302
	120 cycles/hour	328	328	289	328	289	289	265	258
	300 cycles/hour	307	307	269	307	269	269	251	242
	600 cycles/hour	306	306	263	306	263	263	249	239
	1500 cycles/hour	284	284	251	284	251	251	241	234
	3000 cycles/hour	232	232	239	232	239	239	221	215
	6000 cycles/hour	203	203	235	203	235	235	217	197
	12000 cycles/hour	175	175	208	175	208	208	192	173
RMS average torque for a typical S5 duty cycle, T_{2TH} (Nm) S5 intermittent duty cycle Duty cycle ED<60%, Cycle duration t_{cycle} <20 min Average cycle speed $\leq n_{1TH}$ As per DIN-3990 and ISO-6336	60 cycles/hour	188	188	172	188	172	172	160	151
	120 cycles/hour	164	164	144	164	144	144	133	133
	300 cycles/hour	157	157	135	157	135	135	126	121
	600 cycles/hour	153	153	132	153	132	132	124	120
	1500 cycles/hour	142	142	125	142	125	125	120	117
	3000 cycles/hour	116	116	120	116	120	120	111	108
	6000 cycles/hour	101	101	117	101	117	117	108	99
	12000 cycles/hour	88	88	104	88	104	104	96	86
Emergency Stop Torque, T_{2E} (Nm) Up to 1000 times during product lifetime		505	505	607	505	607	607	607	505
Maximum input speed for S5 intermittent duty cycle operation, n_{1max} (rpm)		4000	4000	4500	4000	4500	4500	4500	4500
Average input speed for S5 intermittent service, n_{1TH} (rpm) Values for 20°C ambient temperature (For higher temperatures, reduce input speed).		2400	2400	2500	2400	2500	2500	2700	2700
Design life. Lh (Hours) as per ISO 6336		>40000							
Maximum permissible housing temperature, T (°C)		90 °C							

Technical data for S1 continuous service

GSE-250-M2 (2 stages)		Ratio							
		15	21	25	30	35	50	70	100
Maximum start-up torque for S1 continuous duty, T_{2max} (Nm) S1 continuous duty Duty Cycle ED>60% Cycle Duration $t_{cycle}>20$ min Average cycle speed $\leq n_{1TH}$ Maximum cycle speed $\leq n_{1max}$ As per DIN-3990	5000 hours	313	313	345	313	345	345	331	280
	10000 hours	287	287	296	287	296	296	268	255
	20000 hours	268	268	258	268	258	258	239	130
	50000 hours	261	261	236	261	236	236	219	211
	100000 hours	246	246	229	246	229	229	215	207
S1 continuous duty output torque, T_{2TH} (Nm) S1 continuous duty Duty Cycle ED>60% Cycle Duration $t_{cycle}>20$ min Average cycle speed $\leq n_{1TH}$ Maximum cycle speed $\leq n_{1max}$ As per DIN-3990	5000 hours	190	190	209	190	209	209	201	170
	10000 hours	174	174	179	174	179	179	163	155
	20000 hours	163	163	165	163	165	165	153	139
	50000 hours	161	161	143	161	143	143	133	128
	100000 hours	149	149	138	149	138	138	129	121
Emergency Stop Torque T_{2E} (Nm) up to 1000 times during product lifetime		505	505	607	505	607	607	607	505
Maximum input speed for S1 continuous duty, n_{1max} (rpm) Only for short periods		2500	2500	2500	2500	2500	2500	2800	2800
Maximum rated input speed for S1 continuous duty, n_{1TH} (rpm) Assumes ambient temperature of 20°C (if >20°C, lower the input speed) This speed can be maintained for the whole cycle		2200	2200	2200	2200	2200	2200	2200	2200
Max. allowable housing temperature T (°C)		90 °C							

General technical data

GSE-250-M2 (2 stages)		Ratio							
		15	21	25	30	35	50	70	100
Standard Torsional Backlash $\Delta\phi$ (arcmin)		<12	<12	<12	<12	<12	<12	<12	<12
Torsional Stiffness C (Nm/arcmin)		30	30	35	30	35	35	32	30
Efficiency η (%)		97%	97%	97%	97%	97%	97%	97%	97%
Inertia (kg·cm ²)		1,35	1,49	0,75	0,21	0,38	0,19	0,18	0,18
Inertia due to input shaft ϕ (kg·cm ²)	$\phi 11$ mm	1,58	1,58	1,58	1,58	1,58	1,58	1,58	1,58
	$\phi 14$ mm	1,56	1,56	1,56	1,56	1,56	1,56	1,56	1,56
	$\phi 19$ mm	2,32	2,32	2,32	2,32	2,32	2,32	2,32	2,32
	$\phi 24$ mm	2,64	2,64	2,64	2,64	2,64	2,64	2,64	2,64
	$\phi 32$ mm	3,68	3,68	3,68	3,68	3,68	3,68	3,68	3,68
Environmental conditions Values outside of this range available upon request		-15°C a 40°C							
Protection degree		IP 64							
Noise level Unloaded, at $n_1=3000$ rpm, from a 1m distance		<69 dB(A)							
Lubrication		Lifetime grease lubrication or synthetic oil							
Direction of rotation		Same as motor							
Weight (kg)		10,5							

Bearings

Bearing service life depends mostly on output speed and axial load. Other factors, such as lubricant type, normally occurring impurities in the lubricant, operating temperature, etc. have also been taken into account. For the following chart, axial load is assumed to be in the middle of the output shaft. Contact our engineering team with your specific application.

GSE gearboxes come with standard bearings for general automation applications, and with reinforced bearings for demanding applications such as robotics or machine tools.


Standard bearings

GSE-250 gearboxes use deep groove ball bearings as the default configuration.

Permitted shaft loads


Based on nominal bearing lifetime (L_{nh} as per ISO 281)

	Maximum Value	10000 hours	20000 hours	30000 hours	40000 hours
F _{2R} (N) Allowable radial force (Applied to the middle of the output shaft and n ₂ =100 rpm)	4500	3100	2650	2400	2200
F _{2A} (N) Allowable axial force n ₂ =100rpm (For both push and pull)	5000	4000	3000	2500	2000
F _{2R} = F _{2A} (N) simultaneously. For other complex cases, please inquire.	4000	3000	2500	2200	2050

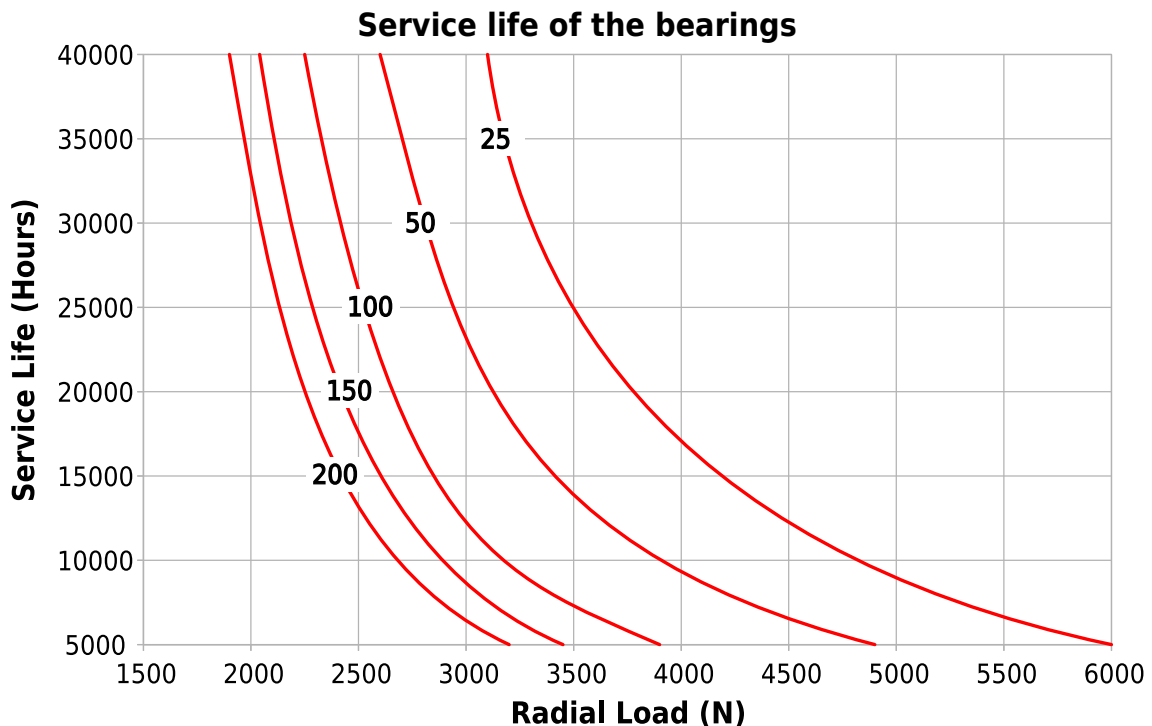

Bearing Service Life depending on radial load (N) and output speed (rpm)
Standard calculation as per DIN ISO 281

Dimensions

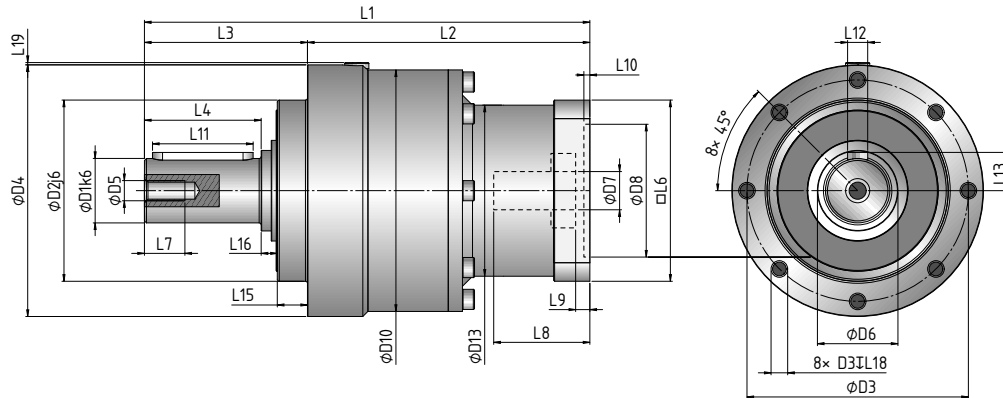


			GSE-250-M2
D ₁	Output shaft diameter		32
D ₂	Pilot flange diameter		90
D ₃	Output flange fixing hole P.C.D.		110
D ₄	Output flange diameter		125
D ₅	DIN 332 hole diameter		M10
D ₆	Output shaft root diameter		40
D ₇	Input shaft diameter	min	9
D ₇	Input shaft diameter	max	24
D ₈	Input pilot flange diameter	min	50
D ₈	Input pilot flange diameter	max	110
D ₉	Output flange fixing hole diameter		M8
D ₁₀	Housing diameter		120
D ₁₃	Input Stage Diameter		85
L ₁	Total length	min	220
L ₁	Total length	max	236
L ₂	Housing length	min	139
L ₂	Housing length	max	155
L ₃	Length from the output flange		81
L ₄	Output shaft length		58
L ₅	Pilot diameter width		15
L ₆	Input flange side	min	85
L ₆	Input flange side	max	120
L ₇	DIN 332 hole thread depth		28
L ₈	Input shaft length	min	45
L ₈	Input shaft length	max	56
L ₉	Available distance until the hollow input shaft	min	3.5
L ₉	Available distance until the hollow input shaft	max	19
L ₁₀	Input pilot flange height	min	3.5
L ₁₀	Input pilot flange height	max	10
L ₁₁	Key length		50
L ₁₂	Key width		10
L ₁₃	Height over shaft		35
L ₁₆	Output shaft root height		8
L ₁₈	Output flange fixing hole thread depth		18
L ₁₉	Plug Height		1,5


Todas las cotas en mm. Dimensiones validas para la mayoría de los modelos de servomotor. Para dimensiones especiales, consulte. Valores sujetos a cambios de mejora sin previo aviso.

Accessories

B5 / B14 Adapter Flange for GSE-250

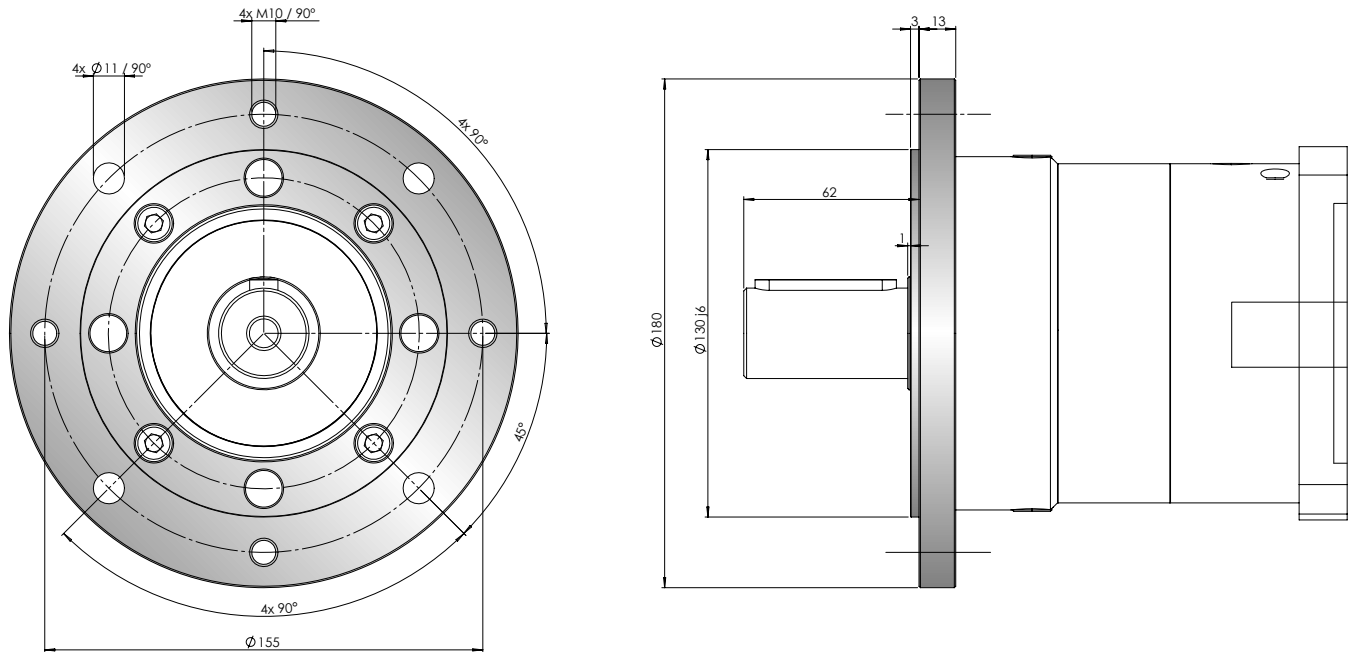

All dimensions in mm. Other flange sizes available upon request.

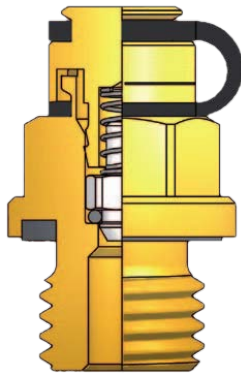

Vent Plugs

VP-G vent plugs use state of the art technology in pressure relief systems for gearboxes. A stainless steel spring lets the relief valve release generated gases while blocking ingress of contaminants.

VP-G plugs are most often installed for gearboxes that will either work under S1 continuous duty conditions, or whose duty cycle requires it. They are factory installed at the right location for the gearbox's correct operation. A rubber gasket seals the plug during transportation to prevent oil leakage.